

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 36 TOWNSHIP 17 RANGE 2

DATE: 10-10-08

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison w/ 1/4 corner cap


METHOD OF ESTABLISHMENT: County: 4-13-02

IN. S.P.C. E ZONE NAD '83

NAME: 17023603

N: 514582.6851(m)

E: 50881.9823(m)

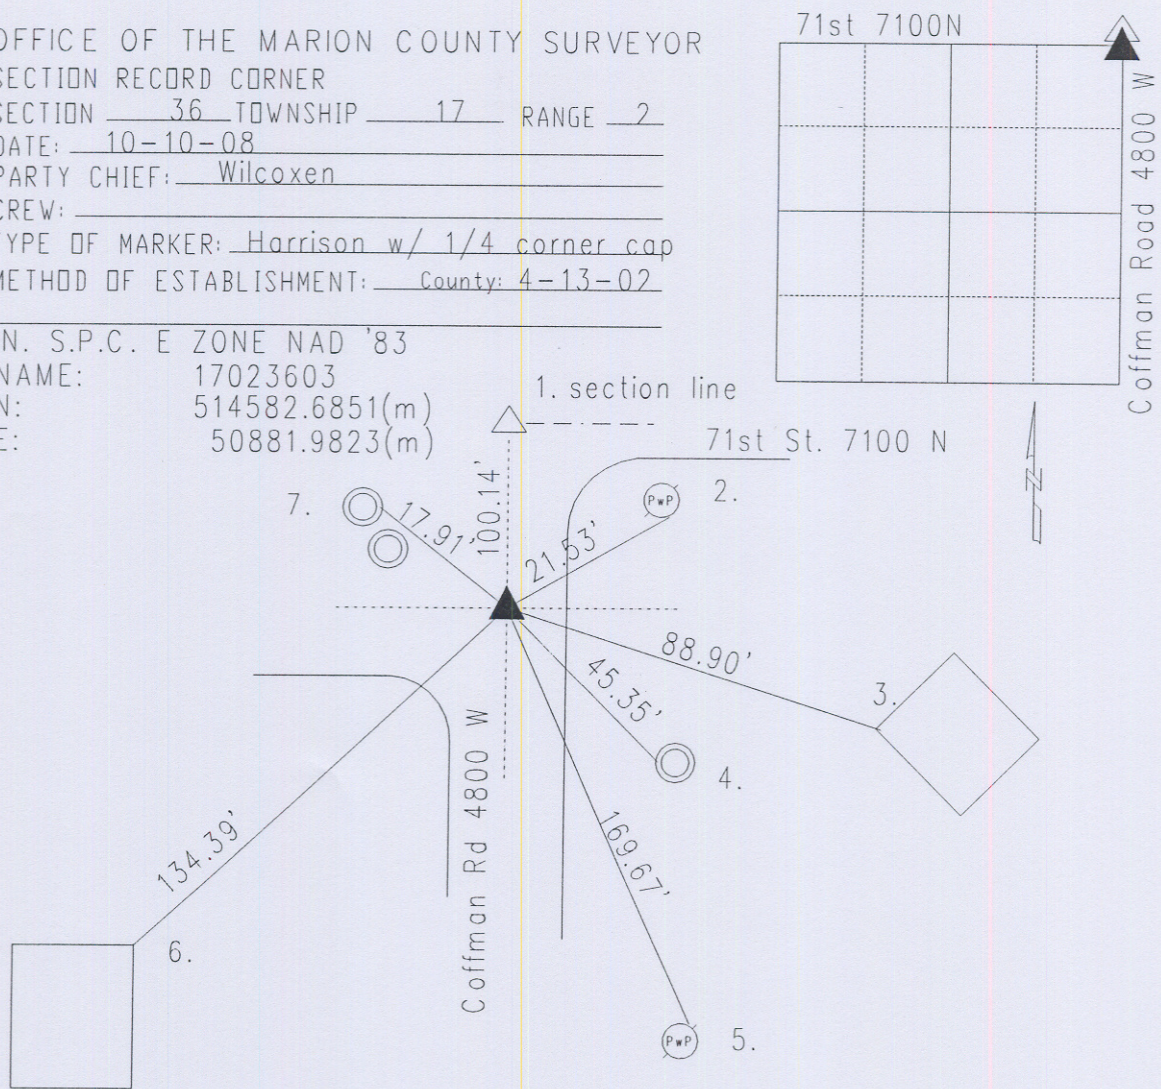

Original post set 1821 by Laughlin with witness: 12" hickory N 25 16 links; 10" beech S 25 W 36 links per Marion County Atlas pg. 4. February 14 & 15-1853 Hosbrook called no stone but witness: 20" oak S 26 W 45 1/2 links per Pike Township Legal Survey Book pg. 45. MCSO 4-7-47 called pipe over stone. Schmidt 9-27-1961 called same. McLand 11-16-73 called an iron pin. Miller 5-23-75 called 3/4" rebar. Green 2-4-83 called iron pin. Wilcoxon 3-31-97 called PK nail. Excavated 10-15-97 by Wilcoxon and iron pin fd 3" dn. Another iron pipe and 2 railroad spikes were also found 5" down. Stone found 24" down under the iron pin. Harrison set. Re-tied 4-13-02 by Wilcoxon. Re-tied 10-10-08 by Wilcoxon. 17023603

REF.	DISTANCE	DESCRIPTION
1.	100.14'	Due N to PK nail NW corner of 31-17-3
2.	21.53'	Mag nail w/brass washer S PwP#139-257 6"up
3.	88.90'	NW corner of block garage
4.	45.35'	Cut 'x' W-rim of storm inlet manhole
5.	169.67'	PK nail E PwP#167-257 10"up
6.	134.39'	NF corner of brick ADDRESS 4803
7.	17.91'	Cut 'x' F-rim of bell manhole ( NW one of the two)